


LIGHTALK 8 (LA-30022)



Product description


With remote driver - Constant current (CC)
500 mA - 1205 mm - Class I



Luminaire structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two IP68 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable for LA-30022
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately


Light symbol

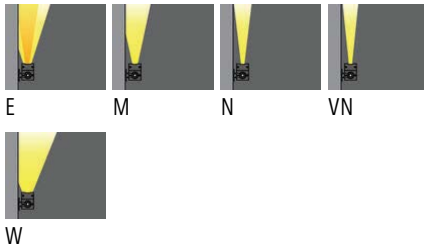

Product colour



Special finishes upon request

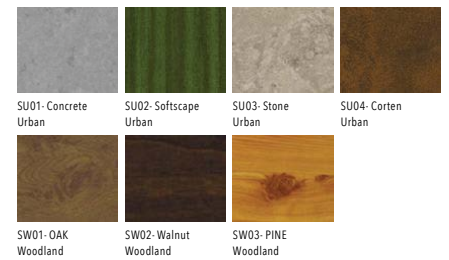

Technical information

Light source	36 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	4.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	55 W
Lumen	3908 - 5703 lm
Efficacy	71 - 104 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	500 mA
Driver option	Remote driver for constant current (CC) is included
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	E [18° x 35°], M [24°], N [14°], VN [12°], W [42°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LIGHTALK 8 (LA-30022)

Product variants

HOW TO SPECIFY

LIGA	-	LA-30022	-	500	-	VN	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
LA-30022	500 55W	E	8030	ND	01 BLACK							
		M	8040	DALI	02 DARK GREY							
		N			03 WHITE							
		VN			05 MATT SILVER							
		W			06 BRONZE							
					S - SPECIAL FINISH							

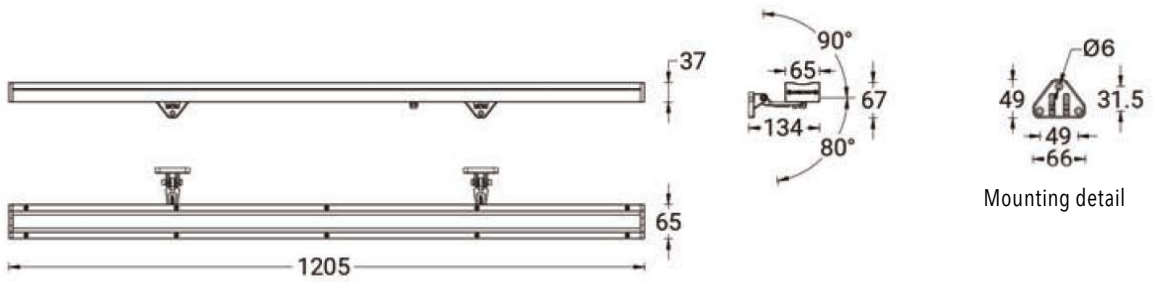

Accessories



75 mm extend arm mounting
LIGA-A30891



150 mm extend arm mounting
LIGA-A30991



300 mm extend arm mounting
LIGA-A31091



450 mm extend arm mounting
LIGA-A31191