



TANGO 35 (TA-20732)



Product description


2 sides - Square
Supplied with 3 m square,
straight aluminium pole:
LIGA-APC130102-TA-20732

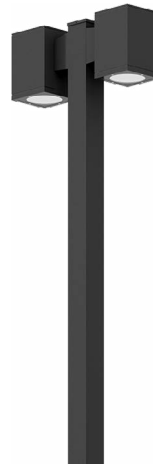

Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Maximum wind load resistance is 140 km/h


Light symbol

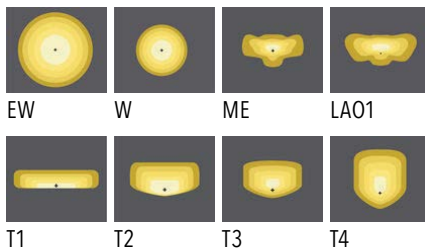

Product colour



Special finishes upon request

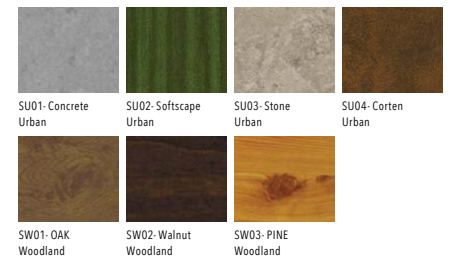

Technical information

Light source	2 x 16 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	5.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	36 W & 70 W
Lumen	3470 - 7820 lm
Efficacy	99 - 112 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 & 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	EW [105°x113°], W [51°x56°] ME [58°x136°], LAO1 [151°x65°] T1 [145°x68°], T2 [50°x134°] T3 [64°x125°], T4 [72°x98°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000


TANGO 35 (TA-20732)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
TA-20732	350 36W	EW	8030	ND	01 BLACK
	700 70W	W	8040	DALI	02 DARK GREY
		ME			03 WHITE
		LA01			05 MATT SILVER
		T1			06 BRONZE
		T2			S - SPECIAL FINISH
		T3			
		T4			

LIGA - TA-20732 - 350 - LA01 - 8030 - ND - 01

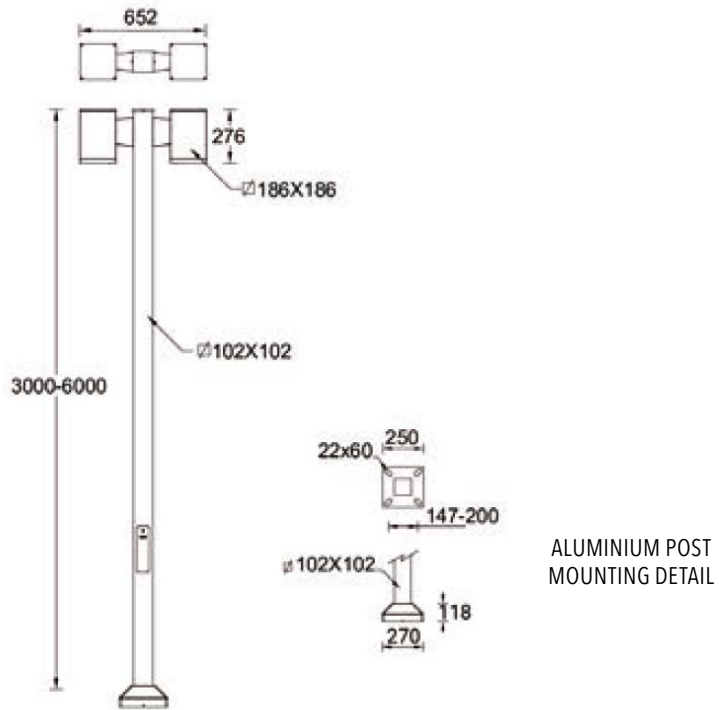

Accessories



Circuit breaker box IP44
LIGA-A21291



Root mount kit
LIGA-A20491