



## Product description


Large



## Luminaire structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

## Light symbol

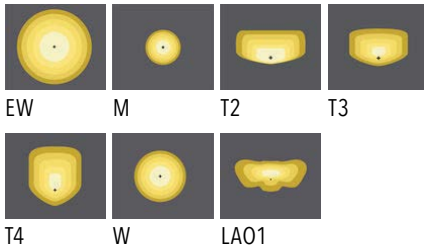

## Product colour



## Special finishes upon request



## Technical information

Light source	24 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	4.9 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	54 W
Lumen	6104 - 6954 lm
Efficacy	113 - 129 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	EW [99°x102°], M [30°], T2 [129°x49°], T3 [112°x80°], T4 [89°x60°], W [56°], LA01 [151°x65°]
Bug	B2-U0-G0, B3-U0-G0, B1-U0-G1
ULOR	0%
CIE flux code n°3	99, 98, 97
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

VEKTER 2 (VK-30004)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
VK-30004	700 54W	EW	8030	ND	01 BLACK
		M	8040		02 DARK GREY
		T2			03 WHITE
		T3			05 MATT SILVER
		T4			06 BRONZE
		W			S - SPECIAL FINISH
		LA01			

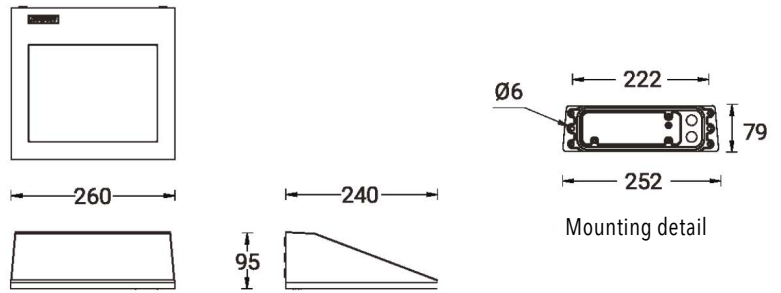

Accessories



Surface mounting box for easy cabling (VEKTER 2)  
LIGA-SCE-VEKTER-2