

VANCOUVER 38 (VA-10141)



Product description

120x120 mm - 600 mm - No decorative pattern



Luminaire structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear

Light symbol




G

Product colour



Special finishes upon request

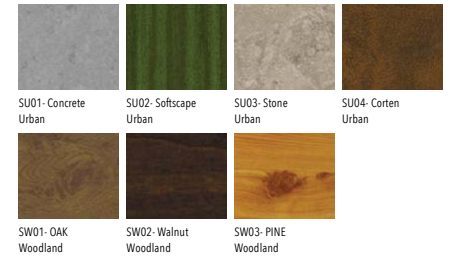

Technical information

Light source	1 LED
Light source type	LED
Dimming type	On/Off
Material	Aluminium
Weight	4.4 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	8 W
Lumen	90 - 95 lm
Efficacy	11 - 12 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	250 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [107°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	109,000
Lifetime L80B10 (hrs)	109,000
Lifetime L80B50 (hrs)	109,000

VANCOUVER 38 (VA-10141)

Product variants

HOW TO SPECIFY

LIGA	-	VA-10141	-	250	-	G	-	8030	-	ND	-	01
MODEL		OUTPUT	DISTRIBUTION		CRI/CCT	DIMMING		COLOUR FINISH				
VA-10141		250 8W	G		8030	ND		01 BLACK				
					8040			02 DARK GREY				
								03 WHITE				
								05 MATT SILVER				
								06 BRONZE				
								S - SPECIAL FINISH				

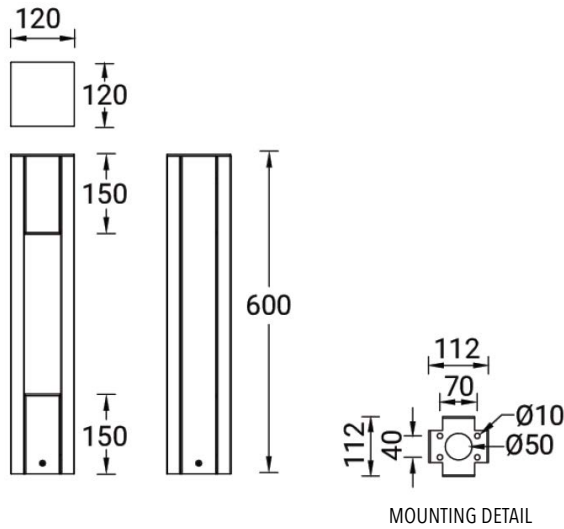

Accessories



Anchor Bolt
LIGA - A12491