

QUANTUM 2 (QA-50015)



Product description

Medium - RGBW



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for QA-50015
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Light symbol




E N M

Product colour



01- Black (RAL 9011) 02- Dark Grey (RAL 7043) 03- White (RAL 9003) 05- Matt Silver (RAL 9006)
06- Bronze (RAL 6014)

Special finishes upon request

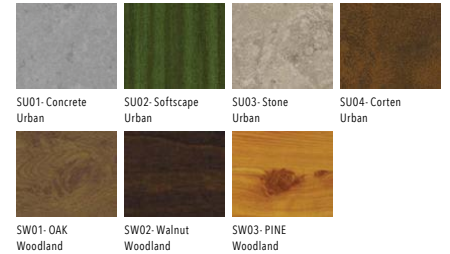

SU01- Concrete Urban SU02- Softscape Urban SU03- Stone Urban SU04- Corten Urban
SW01- OAK Woodland SW02- Walnut Woodland SW03- PINE Woodland

Technical information

Light source	18 LED
Light source type	LED
Dimming type	DALI, DMX/RDM
Material	Aluminium
Weight	8.5 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	77 W
Lumen	2900 - 3580 lm
Efficacy	36 - 46 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	E [25°x48°], N [20°], M [35°]
Bug	B3-U1-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100

QUANTUM 2 (QA-50015)

Product variants

HOW TO SPECIFY

LIGA - QA-50015 - 700 - M - RGBW30 - DMX/RDM - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
QA-50015	700 77W	E	RGBW30	DALI	01 BLACK	
		N	RGBW40	DMX/RDM	02 DARK GREY	
		M			03 WHITE	
					05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

