


LIGHTALK 15 (LA-30034)



Product description


Without remote driver - Constant voltage (CV)
24 V - 610 mm - Class III - RGBW



Luminaire structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Four IP68 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-30034
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver for constant voltage (CV) not included
- DC24V input, DMX512 address with constant current control for RGBW products


Light symbol

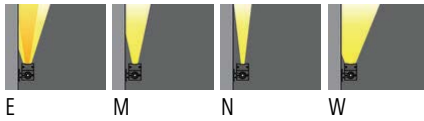

Product colour



Special finishes upon request

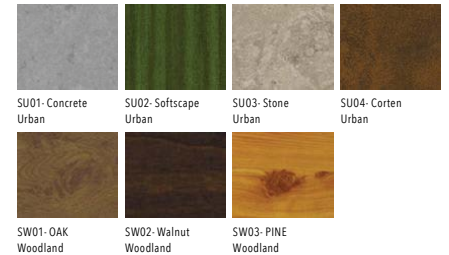

Technical information

Light source	18 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	3.7 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	35 W
Lumen	905 - 1948 lm
Efficacy	26 - 56 lm/W
CCT / CRI	RGBW30, RGBW40, RGB+Amber
Drive current	24 VDC
Driver option	Remote driver for constant voltage (CV) not included
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC


Optic	E [20°x30°], M [32°], N [16°], W [55°]
-------	--

LIGHTALK 15 (LA-30034)

Product variants

HOW TO SPECIFY

LIGA - LA-30034 - 35 - M - RGBW30 - DMX/RDM - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
LA-30034	35W	E	RGBW30	DMX	01 BLACK	
		M	RGBW40	DMX/RDM	02 DARK GREY	
		N	RGB+AMBER		03 WHITE	
		W			05 MATT SILVER	
					06 BRONZE	
					S- SPECIAL FINISH	

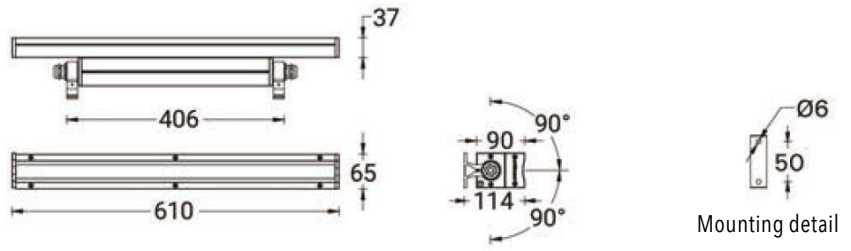

Accessories



75 mm extend arm mounting
LIGA-A30891



150 mm extend arm mounting
LIGA-A30991



300 mm extend arm mounting
LIGA-A31091



450 mm extend arm mounting
LIGA-A31191