

STEAMER 2 (SE-90012-SU)



Product description


Rectangular - Large



Luminaire structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Mounting Bracket included


Light symbol

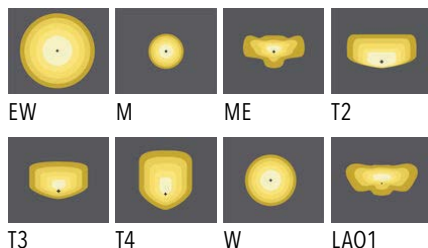

Product colour



Special finishes upon request

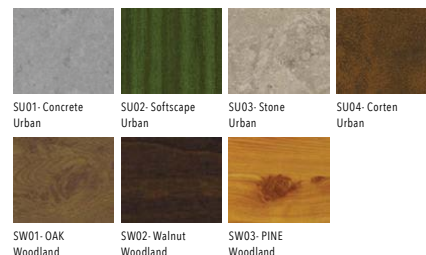

Technical information

Light source	4 x 24 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	10.1 kg
Operating temperature	-20°C to 50°C

Luminaire	
Power	209 W
Lumen	24479 - 28297 lm
Efficacy	117 - 135 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1400 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	EW [105°x115°], M [30°], ME [137°x58°], T2 [136°x51°], T3 [119°x86°], T4 [102°x74°], W [57°], LA01 [151°x65°]
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

STEAMER 2 (SE-90012-SU)

Product variants

HOW TO SPECIFY

LIGA	-	SE-90012-SU	-	1400	-	T2	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
SE-90012-SU	1400 209W	EW	8030	ND	01 BLACK							
		M	8040	DALI	02 DARK GREY							
		ME			03 WHITE							
		T2			05 MATT SILVER							
		T3			06 BRONZE							
		T4			S - SPECIAL FINISH							
		W										
		LA01										

