


LIGHTSOFT 1 (LH-10655)



Product description

Ø186 - 600 mm - Round - IK10



Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency polycarbonate lens
- Anodised, high-purity aluminium reflector
- Integral control gear

Light symbol



G

Product colour



01-Black (RAL 9011) 02-Dark Grey (RAL 7043) 03-White (RAL 9003) 05-Matt Silver (RAL 9006)



06-Bronze (RAL 6014)


Special finishes upon request



SU01-Concrete Urban SU02-Softscape Urban SU03-Stone Urban SU04-Corten Urban



SW01-OAK Woodland



SW02-Walnut Woodland



SW03-PINE Woodland

Technical information

Light source	12 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	6.1 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	14 & 27 W
Lumen	580 - 1188 lm
Efficacy	43 - 44 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 & 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G [360°]
Bug	B1-U0-G1
ULR	8%
ULOR	8%
CIE flux code n°3	75
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

LIGHTSOFT 1 (LH-10655)

Product variants

HOW TO SPECIFY

LIGA	-	LH-10655	-	700	-	G	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
LH-10655	350 14W	G	8030	ND	01 BLACK							
	700 27W		8040	DALI	02 DARK GREY							
					03 WHITE							
					05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

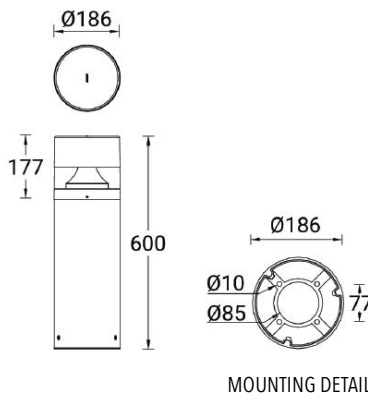

Accessories



Anchor Bolt
LIGA - A10391



Light Shield 180°
LIGA - A10731



Light Shield 90°
LIGA - A10831