


**LIGHTALK 12 (LA-60033)**



**Product description**


With recessing box - Without remote driver  
 Constant voltage (CV) 24 V - 1250 mm  
 Class III - RGBW



**Luminaire structure**

- Die-cast aluminium housing
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Four IP68 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-60033
- Durable silicone rubber gasket
- Clear toughened glass
- Recessing box is included
- Remote driver for constant voltage (CV) not included
- Suitable for walk-over with a maximum load of 500 kg
- DC24V input, DMX512 address with constant current control for RGBW products

**Light symbol**

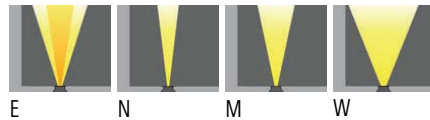

**Product colour**



**Technical information**

Light source	36 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Stainless Steel
Weight	7.8 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	70 W
Lumen	1810 - 3898 lm
Efficacy	33 - 71 lm/W
CCT / CRI	RGBW30, RGBW40, RGB+Amber
Drive current	24 VDC
Driver option	Remote driver for constant voltage (CV) not included
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC



Optic	E [21°x36°], N [15°] M [24°], W [35°]
-------	--

LIGHTALK 12 (LA-60033)

Product variants

HOW TO SPECIFY

LIGA	-	LA-60033	-	70	-	M	-	RGBW30	-	DMX/RDM	-	00
		<b>MODEL</b>		<b>OUTPUT</b>		<b>DISTRIBUTION</b>		<b>CRI/CCT</b>		<b>DIMMING</b>		<b>COLOUR FINISH</b>
		LA-60033		70W		E		RGBW30		DMX		00 STAINLESS STEEL
						N		RGBW40		DMX/RDM		
						M		RGB+AMBER				
						W						

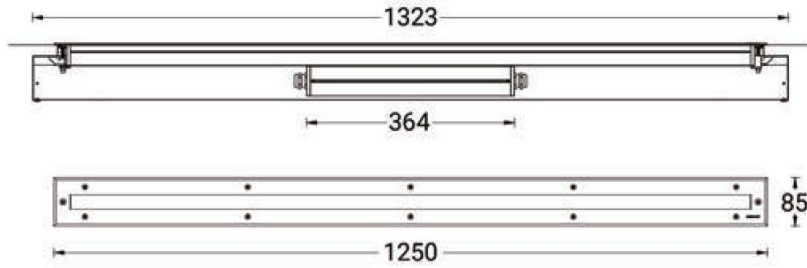

MOUNTING DETAIL