

LIGHTALK 7 (LA-30014)



Product description

With driver - Constant current (CC)
500 mA - 1205 mm - Class I - RGBW



Luminaire structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Four IP68 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-30014
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Light symbol



E M N VN



W

Product colour



01-Black (RAL 9011) 02-Dark Grey (RAL 7043) 03-White (RAL 9003) 05-Matt Silver (RAL 9006)



06-Bronze (RAL 6014)

Special finishes upon request



SU01-Concrete Urban SU02-Softscape Urban SU03-Stone Urban SU04-Corten Urban



SW01-OAK Woodland SW02-Walnut Woodland SW03-PINE Woodland

Technical information

Light source	2 x 20 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	5.3 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	66 W
Lumen	3477 - 4043 lm
Efficacy	53 - 61 lm/W
CCT / CRI	RGBW30, RGBW40
Drive current	500 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	E [18° x 35°], M [25°], N [13°], VN [10°], W [43°]
Bug	B0-U5-G0
ULR	100%
ULOR	100%
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hrs)	50,000
Lifetime L80B10 (hrs)	68,000
Lifetime L80B50 (hrs)	100,000


LIGHTALK 7 (LA-30014)

Product variants

HOW TO SPECIFY

LIGA - LA-30014 - 500 - M - RGBW30 - DMX/RDM - 01

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
LA-30014	500 66W	E	RGBW30	DMX	01 BLACK
		M	RGBW40	DMX/RDM	02 DARK GREY
		N			03 WHITE
		VN			05 MATT SILVER
		W			06 BRONZE
					S - SPECIAL FINISH

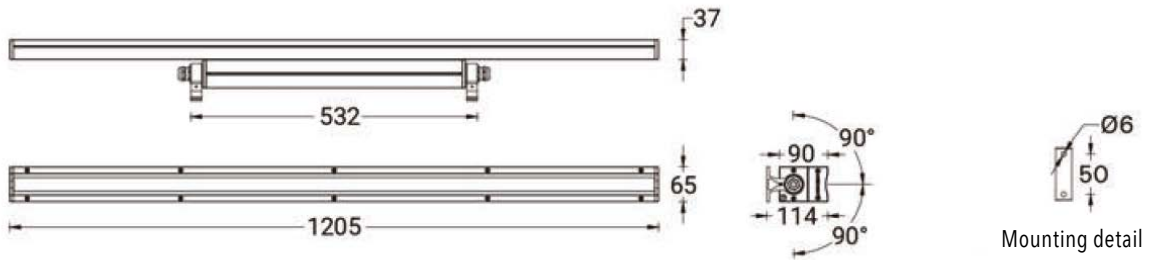

Accessories



75 mm extend arm mounting
LIGA-A30891



150 mm extend arm mounting
LIGA-A30991



300 mm extend arm mounting
LIGA-A31091



450 mm extend arm mounting
LIGA-A31191