


**LIGHTALK 15 (LA-30032)**



**Product description**


Without remote driver - Constant voltage (CV)  
24 V - 410 mm - Class III - RGBW



**Luminaire structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Four IP68 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-30032
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver for constant voltage (CV) not included
- DC24V input, DMX512 address with constant current control for RGBW products


**Light symbol**

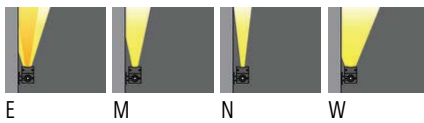

**Product colour**



**Special finishes upon request**

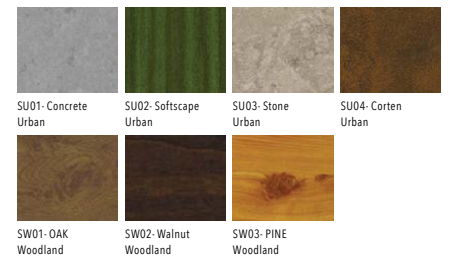

**Technical information**

Light source	12 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	2.2 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	16 W
Lumen	510 - 903 lm
Efficacy	32 - 56 lm/W
CCT / CRI	RGBW30, RGBW40, RGB+Amber
Drive current	24 VDC
Driver option	Remote driver for constant voltage (CV) not included
Driver	Constant voltage (CV) 24V
Input voltage	24 VDC

<b>Optic</b>	E [20°x30°], M [32°], N [16°], W [55°]
--------------	--

LIGHTALK 15 (LA-30032)

Product variants

HOW TO SPECIFY

LIGA - LA-30032 - 16 - VN - RGBW30 - DMX/RDM - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
LA-30032	16W	E	RGBW30	DMX	01 BLACK	
		M	RGBW40	DMX/RDM	02 DARK GREY	
		N	RGB+AMBER		03 WHITE	
		W			05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

