


JET 39 (JE-80031)



Product description


Ø102 - 232 mm - Round



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Light symbol



Product colour



Special finishes upon request



Technical information

| | |
|-----------------------|---------------|
| Light source | 1 COB |
| Light source type | COB |
| Dimming type | DALI, On/Off |
| Material | Aluminium |
| Weight | 1.6 kg |
| Operating temperature | -20°C to 40°C |

| | |
|------------------|--------------------------|
| Luminaire | |
| Power | 14 W |
| Lumen | 1370 - 1618 lm |
| Efficacy | 98 - 116 lm/W |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Drive current | 350 mA |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |



| | |
|-----------------------|---------------------------------------|
| Optic | M [24°], N [18°] VW [72°], W [41°] |
| Bug | B2-U0-G0, B1-U0-G0 |
| ULR | 0% |
| ULOR | 0% |
| CIE flux code n°3 | 100 |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hrs) | 55,000 |

JET 39 (JE-80031)

Product variants

HOW TO SPECIFY

| MODEL | OUTPUT | DISTRIBUTION | CCT | DIMMING | COLOUR FINISH |
|----------|---------|--------------|------|---------|--------------------|
| JE-80031 | 350 14W | M | 8030 | ND | 01 BLACK |
| | | N | 8040 | DALI | 02 DARK GREY |
| | | VW | | | 03 WHITE |
| | | W | | | 05 MATT SILVER |
| | | | | | 06 BRONZE |
| | | | | | S - SPECIAL FINISH |

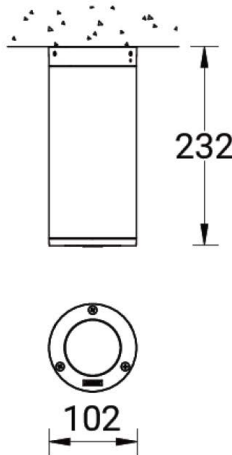

Accessories



Surface mounting box
for easy cabling (JET 39)
LIGA-SCE-JET-39