


JET 40 (JE-80041)



Product description


102x102 mm - 232 mm - Square



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Light symbol

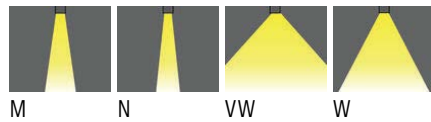

Product colour



Special finishes upon request

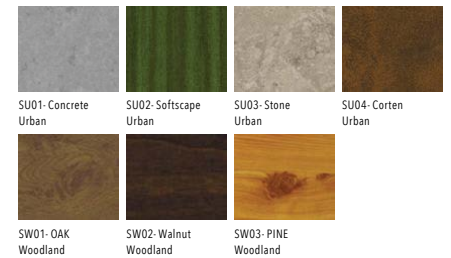

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	2.0 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	14 W
Lumen	1370 - 1618 lm
Efficacy	98 - 116 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	M [24°], N [18°] VW [72°], W [41°]
Bug	B2-U0-G0, B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	55,000

JET 40 (JE-80041)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CCT	DIMMING	COLOUR FINISH
JE-80041	350 14W	M	8030	ND	01 BLACK
		N	8040	DALI	02 DARK GREY
		VW			03 WHITE
		W			05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

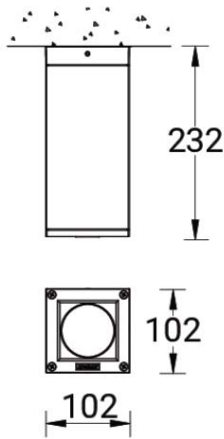

Accessories



Surface mounting box for easy cabling (JET 40)
LIGA-SCE-JET-40