


TANGO 35 (TA-20731)



**Product description**


1 side - Square  
Supplied with 3 m square,  
straight aluminium pole:  
LIGA-APC130102-TA-20731



**Luminaire structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Maximum wind load resistance is 140 km/h


**Light symbol**

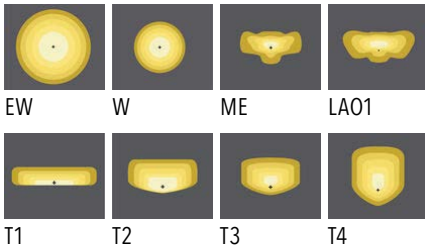

**Product colour**



**Special finishes upon request**

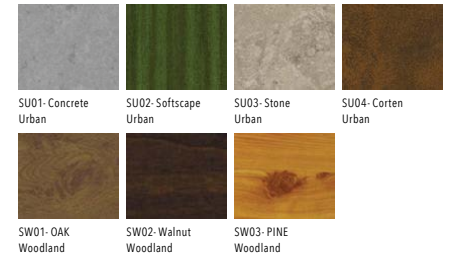

**Technical information**

Light source	16 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	5.3 kg
Operating temperature	-20°C to 40°C


<b>Luminaire</b>	
Power	18 W & 35 W
Lumen	1735 - 3910 lm
Efficacy	99 - 112 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 & 700 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	EW [105°x113°], W [51°x56°] ME [58°x136°], LAO1[151°x65°] T1 [145°x68°], T2 [50°x134°] T3 [64°x125°], T4 [72°x98°]
Bug	B1-U0-G1
ULR	0%
ULOR	0%
CIE flux code n°3	98
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	90,000
Lifetime L80B10 (hrs)	90,000
Lifetime L80B50 (hrs)	90,000

TANGO 35 (TA-20731)

Product variants

HOW TO SPECIFY

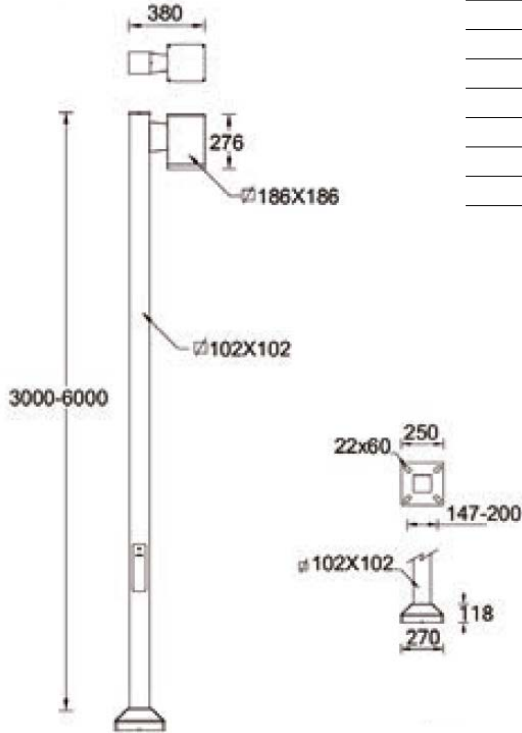

LIGA	TA-20731	350	LA01	8030	ND	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
TA-20731	350 18W	EW	8030	ND	01 BLACK	
	700 35W	W	8040	DALI	02 DARK GREY	
		ME			03 WHITE	
		LA01			05 MATT SILVER	
		T1			06 BRONZE	
		T2			S - SPECIAL FINISH	
		T3				
		T4				

ALUMINIUM POST MOUNTING DETAIL

Accessories



Circuit breaker box IP44  
LIGA-A21291



Root mount kit  
LIGA-A20491



Integrated Glare Technology  
LIGA-IGT