


TANGO 37 (TA-20021)



Product description

2 sides - Round



Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Maximum wind load resistance is 140 km/h

Light symbol



N M W

Product colour



01-Black (RAL 9011) 02-Dark Grey (RAL 7043) 03-White (RAL 9003) 05-Matt Silver (RAL 9006)



06-Bronze (RAL 6014)

Special finishes upon request



SU01-Concrete Urban SU02-Softscape Urban SU03-Stone Urban SU04-Corten Urban



SW01-OAK Woodland SW02-Walnut Woodland SW03-PINE Woodland

Technical information

Light source	2 x 24 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Aluminium
Weight	9.8 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	76 W
Lumen	7268 - 8530 lm
Efficacy	96 - 112 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	1000 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz



Optic	N [12°], M [26°], W [40°]
Bug	B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	120,000
Lifetime L80B10 (hrs)	120,000
Lifetime L80B50 (hrs)	120,000

TANGO 37 (TA-20021)

Product variants

HOW TO SPECIFY

MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH
TA-20021	1000 76W	N	8030	ND	01 BLACK
		M	8040	DALI	02 DARK GREY
		W			03 WHITE
					05 MATT SILVER
					06 BRONZE
					S - SPECIAL FINISH

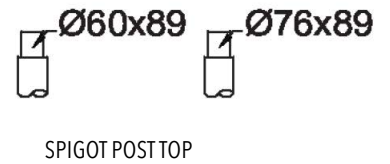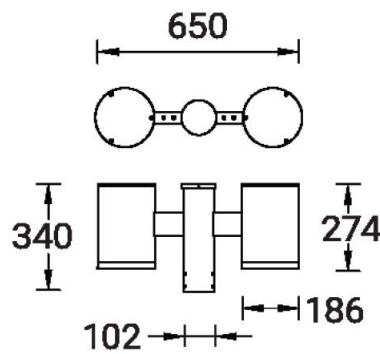

SPIGOT POSTTOP