



**JET 34 (JE-30411)**



**Product description**


160x160 mm - 263 mm - Down - Square



**Luminaire structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

**Light symbol**

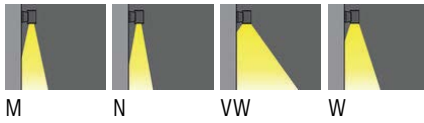

**Product colour**



**Special finishes upon request**



**Technical information**

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	5.1 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	35 W
Lumen	3475 - 4094 lm
Efficacy	99 - 117 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	900 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz





Optic	M [26°], N [16°], VW [59°], W [42°]
Bug	B3-U0-G0, B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	50,700
Lifetime L80B10 (hrs)	63,500
Lifetime L80B50 (hrs)	63,500

JET 34 (JE-30411)

Product variants

HOW TO SPECIFY

LIGA - JE-30411 - 900 - N - 8030 - ND - 01						
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH	
JE-30411	900 35W	M	8030	ND	01 BLACK	
		N	8040	DALI	02 DARK GREY	
		VW			03 WHITE	
		W			05 MATT SILVER	
					06 BRONZE	
					S - SPECIAL FINISH	

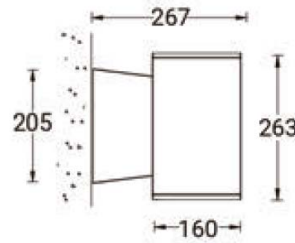

Accessories



Surface mounting box for easy cabling (JET 34)  
LIGA-SCE-JET-34