


LIGHTALK 15 (LA-30036)



Product description


Without remote driver - Constant voltage (CV)
24 V - 1205 mm - Class III - RGBW



Luminaire structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Four IP68 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable for LA-30036
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver for constant voltage (CV) not included
- 24 VDC input, DMX/RDM address with stable - signal


Light symbol

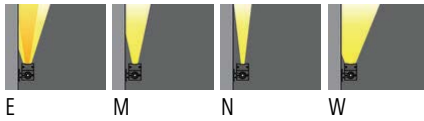

Product colour



Special finishes upon request

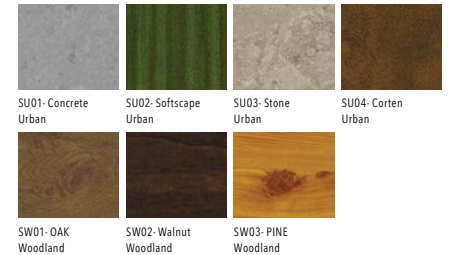

Technical information

Light source	36 LED
Light source type	LED
Dimming type	DMX, DMX/RDM
Material	Aluminium
Weight	6.2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	70 W
Lumen	1810 - 3896 lm
Efficacy	26 - 56 lm/W
CCT / CRI	RGBW30, RGBW40, RGB+Amber
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC


Optic	E [20°x30°], M [32°], N [16°], W [55°]
-------	--

LIGHTALK 15 (LA-30036)

Product variants

HOW TO SPECIFY

LIGA	-	LA-30036	-	70	-	M	-	RGBW30	-	DMX/RDM	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
LA-30036	70W	E	RGBW30	DMX	01 BLACK							
		M	RGBW40	DMX/RDM	02 DARK GREY							
		N	RGB+AMBER		03 WHITE							
		W			05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

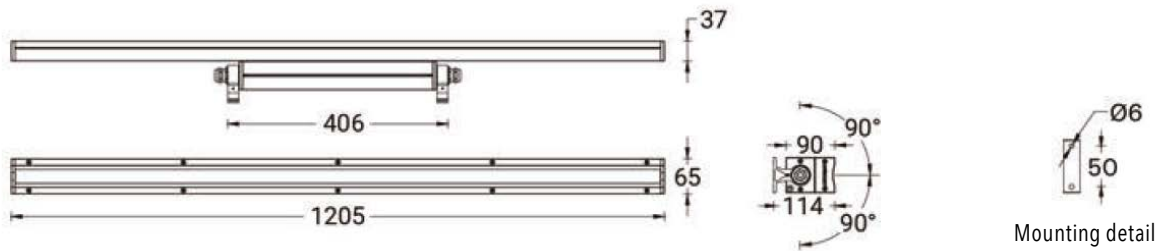

Accessories



75 mm extend arm mounting
LIGA-A30891



150 mm extend arm mounting
LIGA-A30991



300 mm extend arm mounting
LIGA-A31091



450 mm extend arm mounting
LIGA-A31191