

**KIOS 7 (KI-60785)**



**Product description**

With recessing box / driver - Flat frame  
Adjustable: Tilt 5° or 10° (2 step)



**Luminaire structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 5.5 mm thick front ring ingrade 316 stainless steel
- Single cable entry, through wiring upon request
- Supplied with 500mm power cable IP Connector not included
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 2000 kg
- Vehicles with pneumatic tyres can drive over the luminaire but the speed must not exceed 50 km/h
- Load is transferred by the housing to the foundation
- The distance between the floodlight and the illuminated surface should be at least 0.5 m

**Light symbol**



VN

**Product colour**



00 - Stainless Steel

**Technical information**

Light source	7 LED
Light source type	LED
Dimming type	DALI, On/Off
Material	Stainless Steel
Weight	6.5 kg
Operating temperature	-20°C to 40°C

<b>Luminaire</b>	
Power	33 W
Lumen	3091 - 3320 lm
Efficacy	94 - 101 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	VN [8°]
Bug	B0-U5-G0
ULR	100%
ULOR	100%
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	109,000
Lifetime L80B10 (hrs)	109,000
Lifetime L80B50 (hrs)	109,000

KIOS 7 (KI-60785)

Product variants

HOW TO SPECIFY

LIGA	-	KI-60785	-	350	-	VN	-	8030	-	ND	-	00
		<b>MODEL</b>		<b>OUTPUT</b>		<b>DISTRIBUTION</b>		<b>CRI/CCT</b>		<b>DIMMING</b>		<b>COLOUR FINISH</b>
		KI-60785		350 33W		VN		8030		ND		00 STAINLESS STEEL
								8040		DALI		

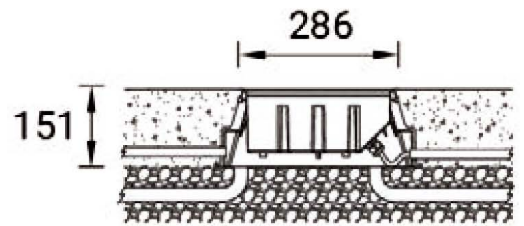

Accessories



Anti slip glass  
LIGA-A61312



Connector IP68  
LIGA-A62591