


JET 31 (JE-30351)



Product description


Ø102 - 218 mm - Down - Round




Luminaire structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Light symbol

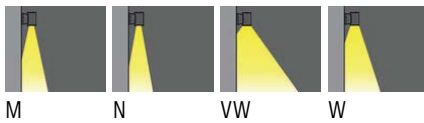

Product colour

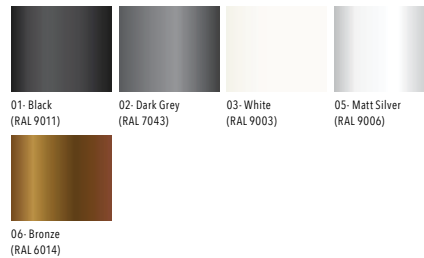

Special finishes upon request

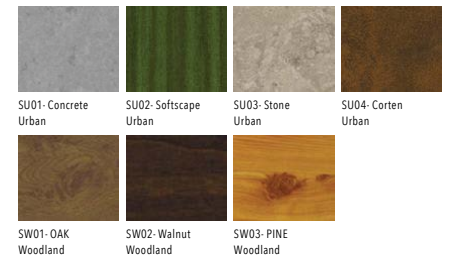

Technical information

Light source	1 COB
Light source type	COB
Dimming type	DALI, On/Off
Material	Aluminium
Weight	2.2 kg
Operating temperature	-20°C to 40°C

Luminaire	
Power	14 W
Lumen	1370 - 1618 lm
Efficacy	98 - 116 lm/W
CCT / CRI	3000K CRI80, 4000K CRI80
Drive current	350 mA
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	M [24°], N [18°], VW [72°], W [41°]
Bug	B2-U0-G0, B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hrs)	55,000

JET 31 (JE-30351)

Product variants

HOW TO SPECIFY

LIGA	-	JE-30351	-	350	-	N	-	8030	-	ND	-	01
MODEL	OUTPUT	DISTRIBUTION	CRI/CCT	DIMMING	COLOUR FINISH							
JE-30351	350 14W	M	8030	ND	01 BLACK							
		N	8040	DALI	02 DARK GREY							
		VW			03 WHITE							
		W			05 MATT SILVER							
					06 BRONZE							
					S - SPECIAL FINISH							

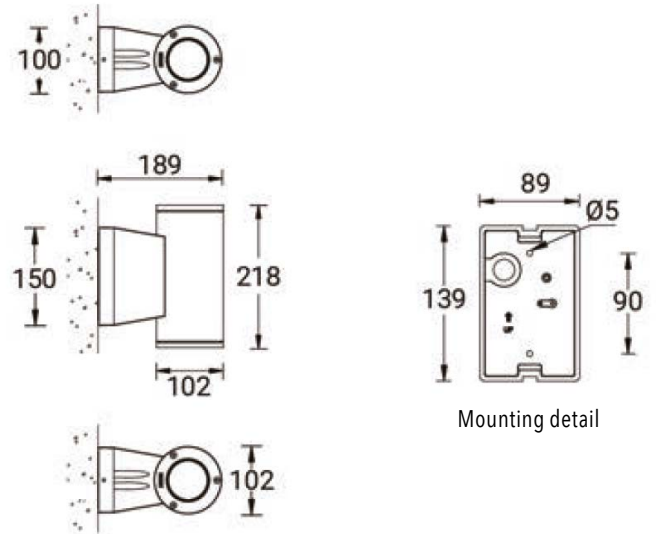

Accessories



Surface mounting box for easy cabling (JET 31)
LIGA-SCE-JET-31